



## Connessione a Forcella

### Fork Connection

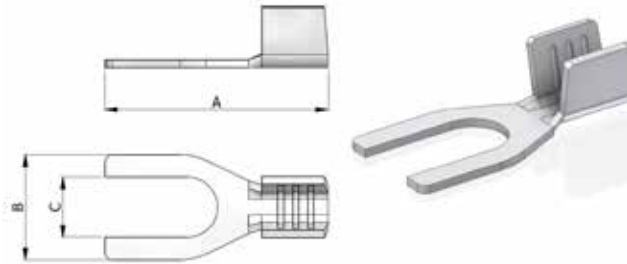

Codice P.N.	Sezione Cavo Wire Range	Ø Isolante Ø Insulation	Spessore Thickness	A	B	C	Q.tà Q.ty	Conf. Pack	Materiale Material
10160-000	1.0 ÷ 2.50		0.50	13.0	7.0	3.20	10.000	2/4	CuZn
10160-011	1.0 ÷ 2.50		0.50	13.0	7.0	3.20	10.000	2/4	CuZnSn
10161-000	1.0 ÷ 2.50		0.50	13.0	7.0	3.70	10.000	2/4	CuZn
10161-011	1.0 ÷ 2.50		0.50	13.0	7.0	3.70	10.000	2/4	CuZnSn
10162-000	1.0 ÷ 2.50		0.50	13.0	7.0	4.20	10.000	2/4	CuZn
10162-011	1.0 ÷ 2.50		0.50	13.0	7.0	4.20	10.000	2/4	CuZnSn
10163-000	1.0 ÷ 2.50		0.50	13.0	7.0	5.20	10.000	2/4	CuZn
10163-011	1.0 ÷ 2.50		0.50	13.0	7.0	5.20	10.000	2/4	CuZnSn

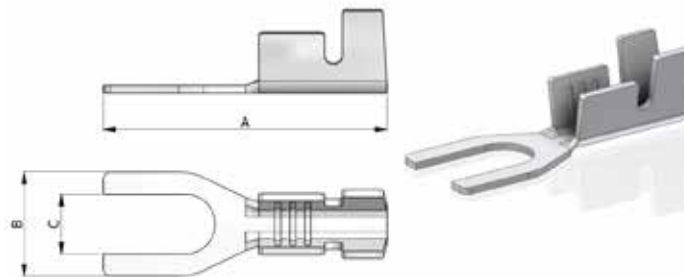

Codice P.N.	Sezione Cavo Wire Range	Ø Isolante Ø Insulation	Spessore Thickness	A	B	C	Q.tà Q.ty	Conf. Pack	Materiale Material
10178-000	1.0 ÷ 2.50		0.50	17.5	7.0	3.20	8.000	2/4	CuZn
10178-011	1.0 ÷ 2.50		0.50	17.5	7.0	3.20	8.000	2/4	CuZnSn
10179-000	1.0 ÷ 2.50		0.50	17.5	7.0	3.70	8.000	2/4	CuZn
10179-011	1.0 ÷ 2.50		0.50	17.5	7.0	3.70	8.000	2/4	CuZnSn
10180-000	1.0 ÷ 2.50		0.50	17.5	7.0	4.20	8.000	2/4	CuZn
10180-011	1.0 ÷ 2.50		0.50	17.5	7.0	4.20	8.000	2/4	CuZnSn
10181-000	1.0 ÷ 2.50		0.50	17.5	7.0	5.20	8.000	2/4	CuZn
10181-011	1.0 ÷ 2.50		0.50	17.5	7.0	5.20	8.000	2/4	CuZnSn